

FISHING STANDS

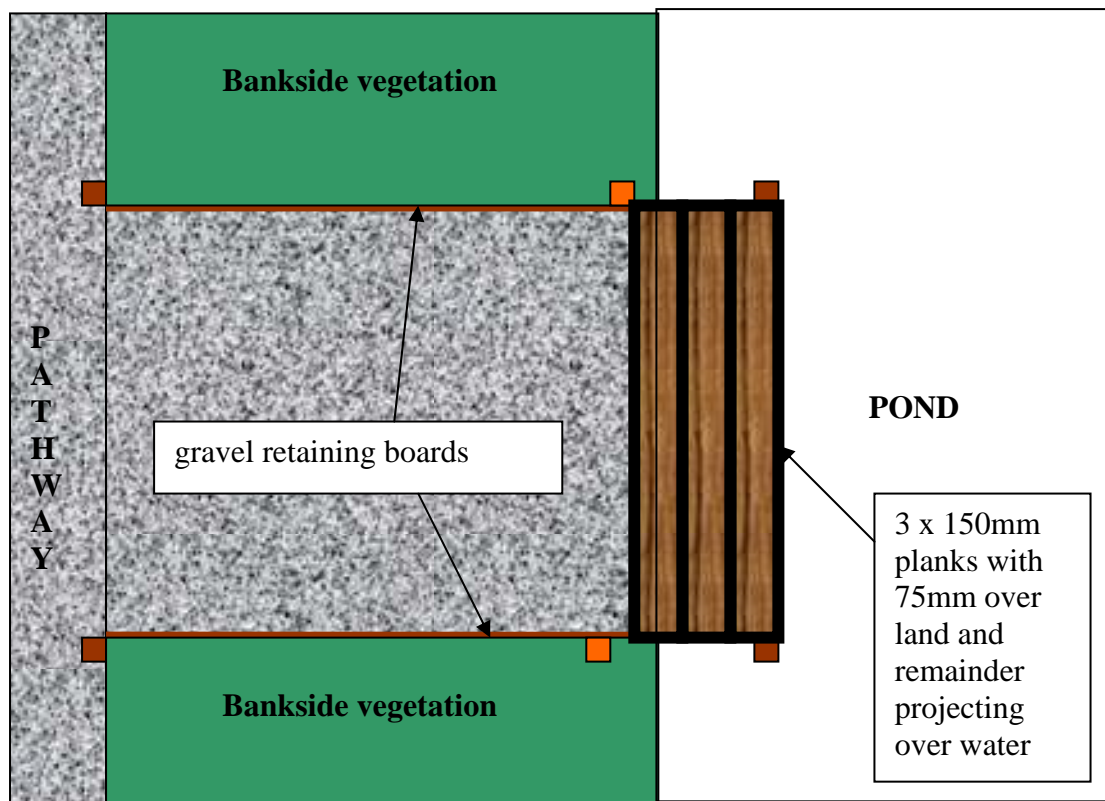






Fig 1: Plan view of stand

Specification

-  3 x planks 150mm x 2000mm x 50mm
Covering of welded joint mesh (eg twill wire) or non-slip paint or use 'everlast wood'
-  4 x posts 100mm x 100mm x length such that 1000mm shows above the surface
-  2 x posts 100mm x 100mm x length such that it reaches knee bar (see fig 2)
-  Compacted 35mm grade aggregate

All timber to be treated for protection against weather and groundwater

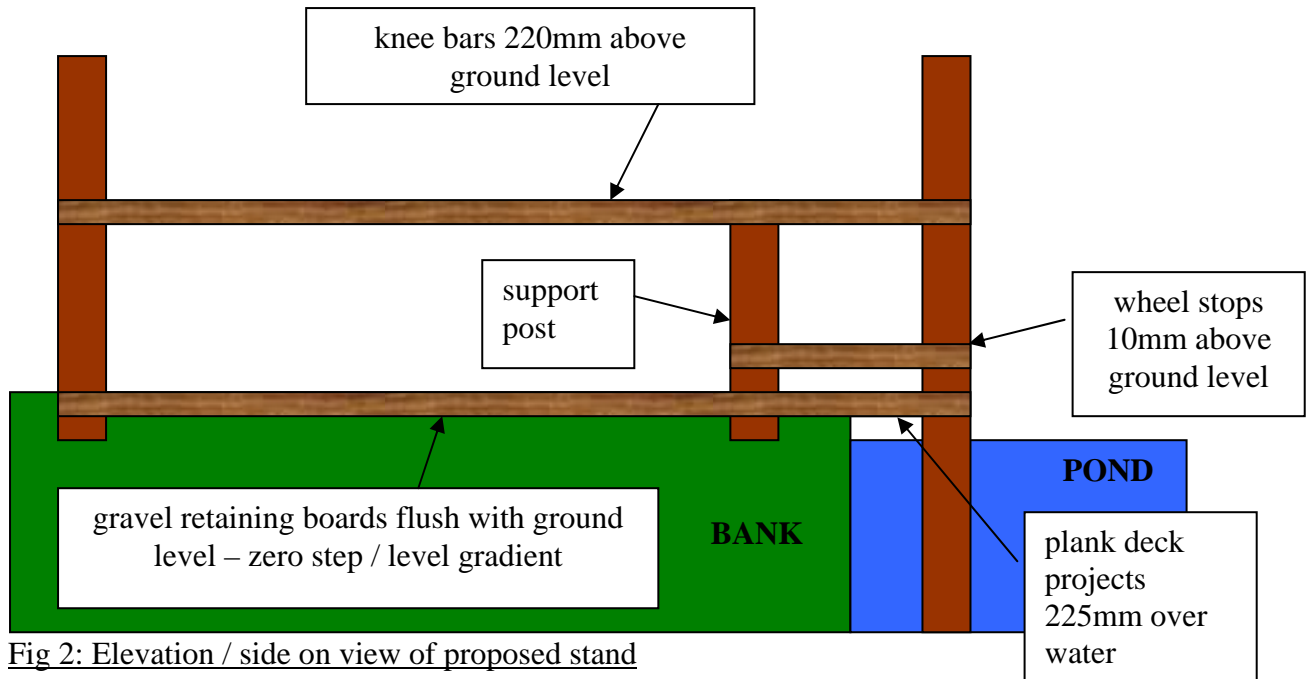



Fig 2: Elevation / side on view of proposed stand

Specification

 Standard D-rail as wheel stops and knee bars and gravel retaining board

All timber to be treated for protection against weather and groundwater

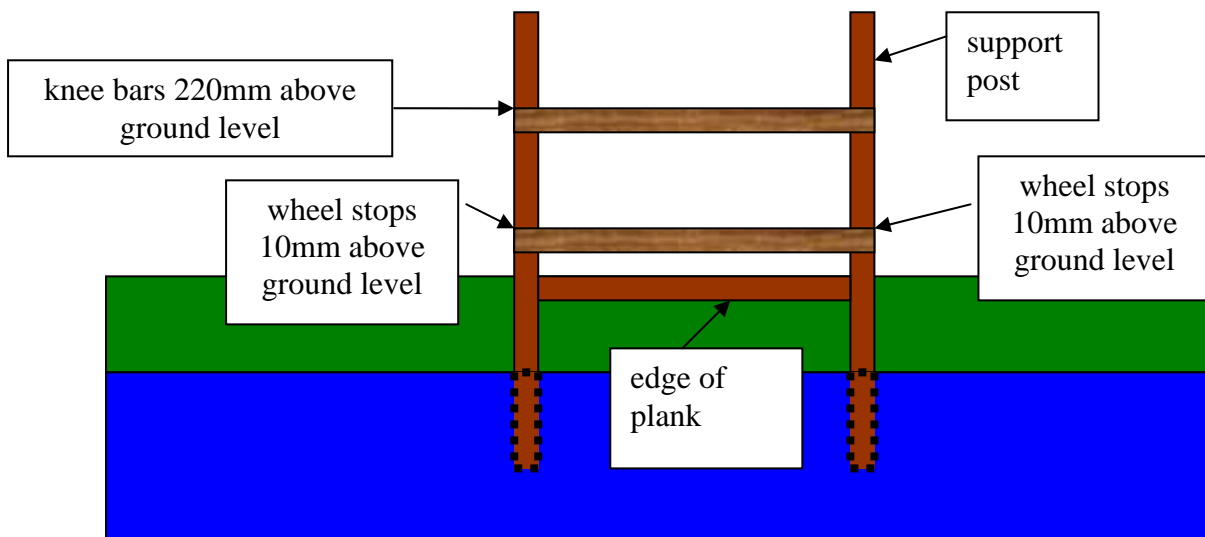



Fig 3: Front view of stand (from water)

Specification

 Standard D-rail as wheel stops and knee bars and gravel retaining board

All timber to be treated for protection against weather and groundwater